


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
1			

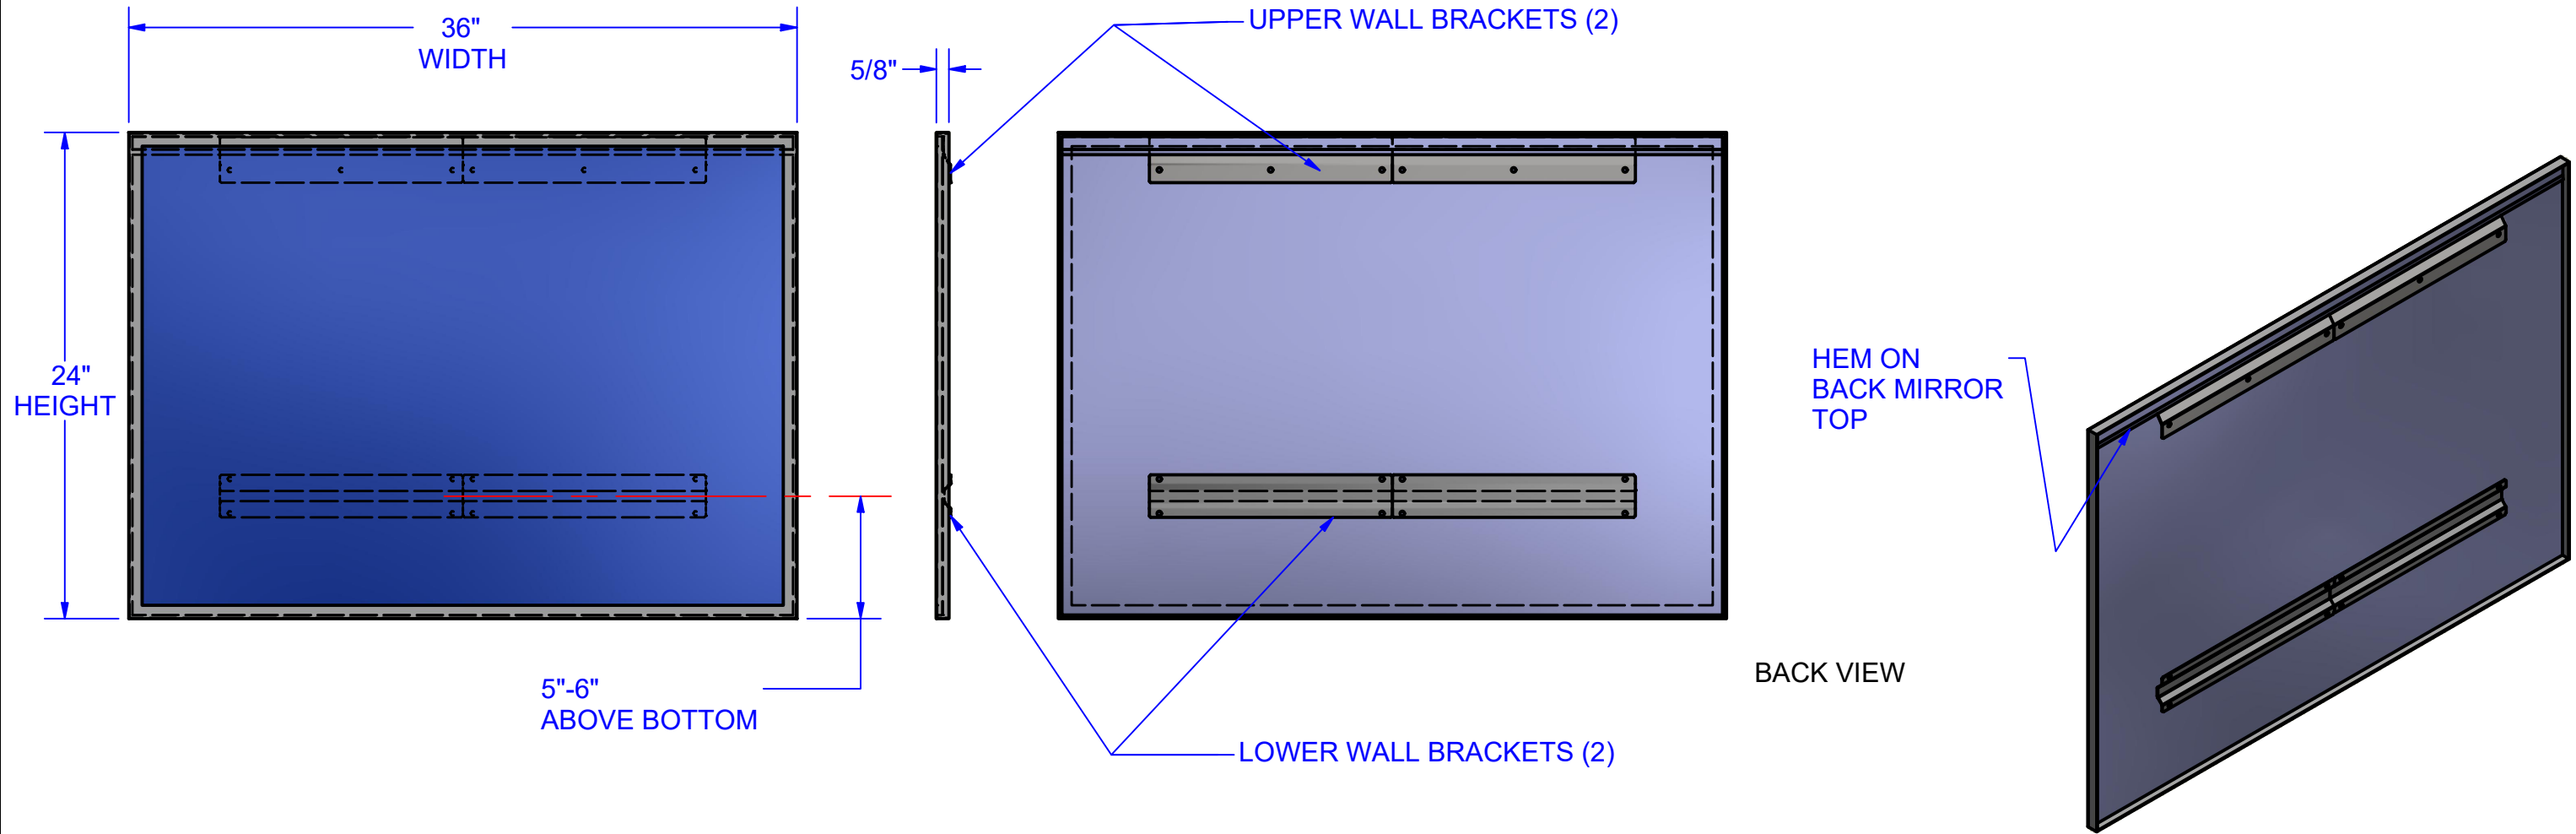

DWG T-1036-24-SS

- Mirrors are fabricated from one piece, 18 ga., 5/8 inch x 5/8 inch type 304, satin finish, stainless steel angle frame with tightly mitered corners.
  - Mirror edges are protected by cushioned adhesive strips to prevent damage.
  - Mirror back is galvanized steel and sealed by continuously applied industrial adhesive.
  - Mirror is secured to wall by 2 vandal/theft resistant brackets.
- 1/4" float glass mirror is silvered and electrolytically copper plated by galvanic process, Mirrors meet Fed. Spec. DDM-411, DD-G-451d, ANSI 2-97.1-1983 and CPSC-Cat 2-16 CFR

- INSTALLATION:**
- 1- Mount upper wall brackets. See above installation notes.
  - 2- Mount lower wall brackets approximately 5" to 6" above mirror bottom.
  - 3- Peel double sided tape liner off lower wall brackets.
  - 4- Place top of mirror above upper wall brackets against wall. Center.
  - 5- Carefully slide mirror down to fully engage mirror hem with upper wall brackets.
  - 6- Level.
  - 7- Carefully push lower portion of mirror toward the wall to attach to industrial adhesive on lower wall brackets.

Consult local and national accessibility codes for proper installation guidelines. Conformity and compliance to local and national codes is the responsibility of the installer. Mirrors are only as strong as the anchoring devices and the wall on which it is mounted to. Mirrors shall be mounted with the bottom edge of the reflecting surface no higher than 40 in. above the finished floor. If mirrors are to be used by both ambulatory people and wheelchair users, then they must be at least 74 in. high at their topmost edge. Mirrors provided above lavatories designed for children should be mounted with the bottom edge of the reflecting surface no higher than 34 in. above the finished floor or at the lowest mounting height permitted by fixtures and related elements.

TOLERANCES -- unless otherwise specified -- ∠ : ± 1° FRACTIONAL : ± 1/8" X.XX : ± 0.010 X.XXX : ± 0.005 X.XXXX : ± 0.0002		<b>BREY-KRAUSE MFG.</b> 1209 W. LEHIGH STREET BETHLEHEM, PA 18018		
DRAWN dmartin      10/16/2023		36"WIDE X 24"HEIGHT MIRROR		
CHECKED				
RELEASE D. MARTIN      12-15-09		SIZE <b>B</b>	DWG NO. <b>T-1036-24-SS</b>	REV <b>1</b>
APPROVED		SCALE		SHEET 1 OF 1
THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL The information contained in this drawing is the sole property of Brey-Krause Mfg. Any reproduction, in part or as a whole without the written permission of Brey-Krause Mfg. is strictly prohibited.				