
(Brey*Krause)

Technical Data

S-4036-SS SECURITY SHELF WITH (4) CLOTHES HOOKS **BREY-KRAUSE MANUFACTURING** 1209 W. LEHIGH STREET BETHLEHEM, PA 18018

Phone: 610-867-1401 Fax: 610-866-1433


www.breykrause.com

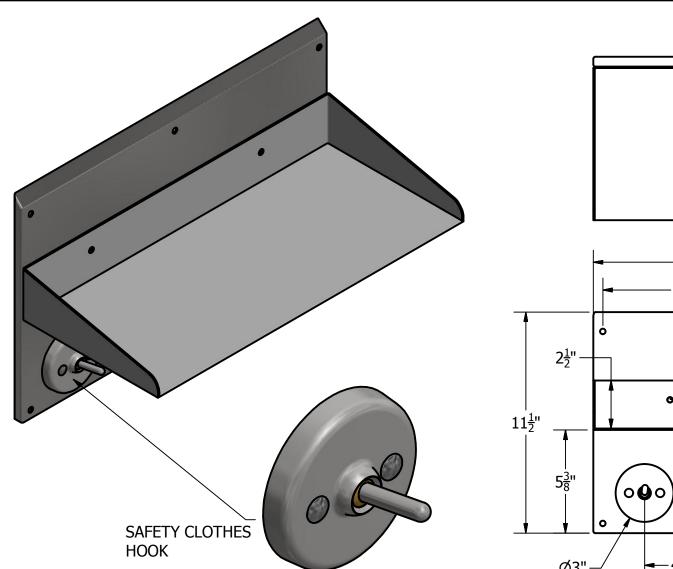

materials without formal notice and without incurring obligation. 10" 000

-9/32"Ø MTG. HOLES TYP. 8X USE WITH SUPPLIED 1/4"-20 X 1 1/2" PIN IN TORX SECUIRTY SCREWS.

Brey-Krause Mfg. reserves the right to make changes in design and/or

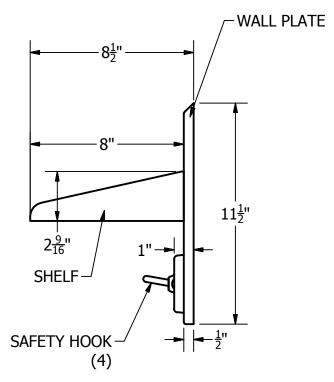

DATA CURRENT AS OF: 9/26/2012

Construction:

WALL PLATE: 14 GAUGE TYPE 304 STAINLESS STEEL WITH (8) MTG. HOLES. SHELF: 14 GAUGE TYPE 304 STAINLESS STEEL FASTEN TO WALL PLATE. SAFETY CLOTHES HOOK (4): 5/16"Ø STAINLESS STEEL ROD WITH PIVOTING BALL JOINT THAT RELEASES UNDER EXCESSIVE LOAD. FASTEN TO WALL PLATE. MOUNTING SCREWS (8): 1/4"-20 X 1 1/2" STAINLESS STEEL PIN IN TORX MS. ALL EXPOSED SURFACES ARE SATIN #4 FINISH.

Operation:

SHELF: 8" DEPTH X 18" WIDE

SAFETY CLOTHES HOOK: EACH HOOK HAS PIVOTING BALL JOINT AND RELEASES WHEN EXCESSIVE LOAD IS APPLIED. HOOK CAN BE RESET BY HAND WHEN REQUIRED.

Installation:

USE QUALIFIED PERSON OR LICENSED INSTALLER. UNIT IS ONLY AS STRONG AS THE ANCHORING DEVICES AND THE WALL IN WHICH IT IS MOUNTED TO.

USE WALL PLATE AS TEMPLATE TO LOCATE AND MARK MOUNTING HOLES. MOUNT TO WALL USING THE SUPPLIED 1/4"-20 X 1 1/2" PIN IN TORX SCREWS AND WALL ANCHORS (NOT INCLUDED).